


PIN CONNECTIONS	
PIN 1.	ENABLE ( INTERNAL PULL UP ) DISABLE ( LOW )
PIN 4.	GROUND
PIN 5.	OUTPUT
PIN 8.	+5 VOLT

### OUTPUT

Tr / Tf < 5nS

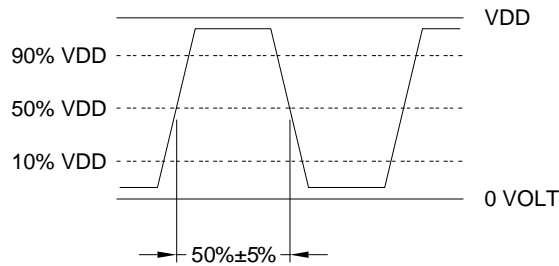

SPECIFICATION	
TYPE NUMBER	QXO - 2005
FREQUENCY RANGE MHz	1.5 MHz to 32 MHz / 36 MHz to 90 MHz
TEMPERATURE STABILITY ( ppm )	±5ppm
TEMPERATURE RANGE	-10°C to +60°C
TRIM TYPE ( No Adjustment )	Preset < ±10ppm
OUTPUT TYPE	HMOS, C-MOS Compatible
OUTPUT DRIVE	1.8 MHz to 32 MHz - 10TTL/CMOS = 50pF 45 MHz to 60 MHz - 5TTL/CMOS = 50pF 60 MHz to 90 MHz - 5TTL/CMOS = 25pF
SUPPLY	+5 Volt ±0.5 Volt