
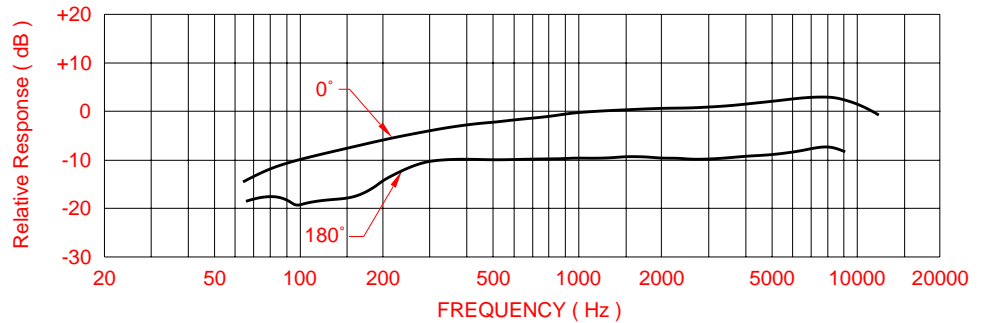


### FM-16B

- SMALL UNIDIRECTIONS MICROPHONE.
- ELECTRET TYPE PROVIDES GREAT RESISTANCE TO VIBRATIONS.
- SUITED TO Hi - Fi SOUND AND REPRODUCTION SYSTEMS.

SENSITIVITY	
<input type="checkbox"/>	-54dB±2
<input type="checkbox"/>	-56dB±2
<input type="checkbox"/>	-58dB±2
<input type="checkbox"/>	-60dB±2
<input type="checkbox"/>	-62dB±2
<input type="checkbox"/>	-64dB±2
<input type="checkbox"/>	-66dB±2
<input type="checkbox"/>	-68dB±2
<input type="checkbox"/>	-70dB±2
<input type="checkbox"/>	-72dB±2

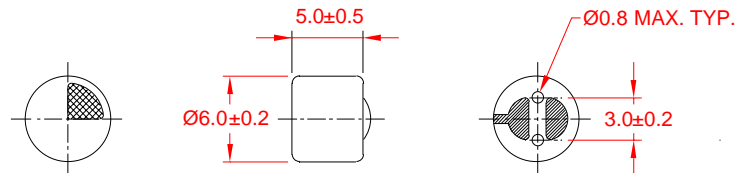

SPECIFICATION	
SENSITIVITY	Refer above (0dB=1Volt / 1µBar, 1kHz)
IMPEDANCE	Low impedance
DIRECTIVITY	Onidirectional (Cardioid)
FREQUENCY	100 Hz to 12,000 Hz
MAXIMUM OPERATING VOLTAGE	10 Volt
STANDARD OPERATING VOLTAGE	2.0 Volt
CURRENT CONSUMPTION	Maximum 0.5mA
SENSITIVITY REDUCTION ( M.H. )	Within -3dB at 1.5 Volt
S/N RATIO	More than 55dB

APPLICATIONS
1. Telephone devices.
2. Handfree microphones for car telephones.
3. Computer microphones.
4. Completed microphones for recording.
5. Others.

